


# SPECIFIED FITTINGS, LLC

164 W. SMITH RD  
 BELLINGHAM, WA 98226  
 888-734-8846 (T)  
 888-734-8258 (F)  
[spec@specfit.com](mailto:spec@specfit.com)

483 STEVENSVILLE AIRPORT RD.  
 STEVENSVILLE, MT 59870  
 406-777-3466 (T)  
 406-777-7181 (F)  
[sales@specfit.com](mailto:sales@specfit.com)

[www.specfit.com](http://www.specfit.com)

SIZE	OD	A	B	CL/150 PART #	CL/200 PART #
2"	2.375	4	4.25	HD3102FM150	HD3102FM200
3"	3.5	4	4.25	HD3103FM150	HD3103FM200
4"	4.5	6	6.25	HD3104FM150	HD3104FM200
5"	5.563	6	6.25	HD3105FM150	HD3105FM200
6"	6.625	6	6.25	HD3106FM150	HD3106FM200
8"	8.625	6.5	7	HD3108FM150	HD3108FM200
10"	10.75	6.5	7	HD31010FM150	HD31010FM200
12"	12.75	8	8.75	HD31012FM150	HD31012FM200
14"	14	8	8.75	HD31014FM150	HD31014FM200
16"	16	8	8.75	HD31016FM150	HD31016FM200
18"	18	8	9	HD31018FM150	HD31018FM200
20"	20	8	9	HD31020FM150	HD31020FM200
24"	24	10	11.25	HD31024FM150	HD31024FM200

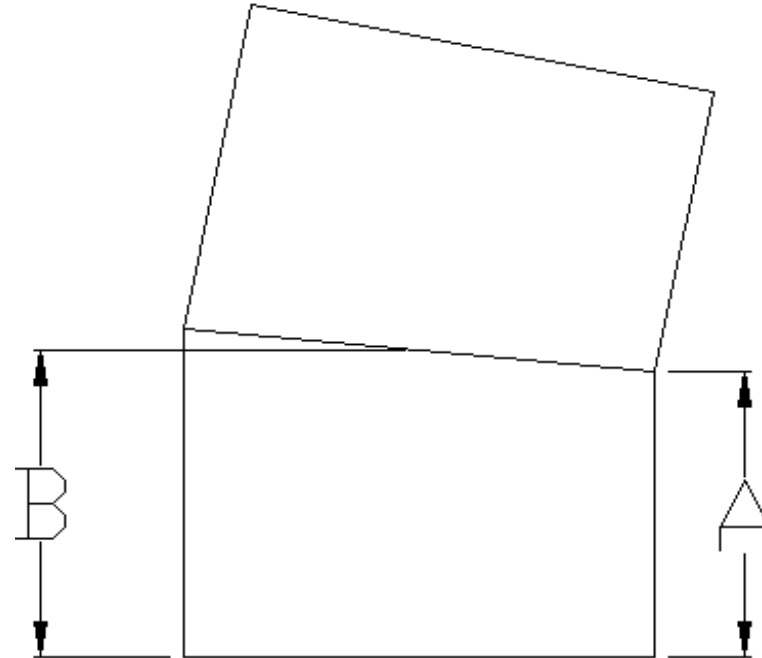

Description: IPS HDPE 2 PC 11.25 DEGREE ELBOW PLAIN-ENDS  
 Material: HDPE  
 Size: 2" - 24"  
 CLASS 150, CLASS 200  
 PSI RATINGS 150, 200

Version 1.5, Copyright 2017

**NOTE:**

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge.

FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.