


SPECIFIED FITTINGS, LLC

164 W. SMITH RD
 BELLINGHAM, WA 98226
 888-734-8846 (T)
 888-734-8258 (F)
spec@specfit.com

483 STEVENSVILLE AIRPORT RD.
 STEVENSVILLE, MT 59870
 406-777-3466 (T)
 406-777-7181 (F)
sales@specfit.com

www.specfit.com

SIZE	OD	A	B	CL/150 PART #	CL/200 PART #
2"	2.375	4	6.5	HD3502FM150	HD3502FM200
3"	3.5	4	6.75	HD3503FM150	HD3503FM200
4"	4.5	6	9	HD3504FM150	HD3504FM200
5"	5.563	6	9.25	HD3505FM150	HD3505FM200
6"	6.625	6	9.5	HD3506FM150	HD3506FM200
8"	8.625	6.5	11.5	HD3508FM150	HD3508FM200
10"	10.75	6.5	12	HD35010FM150	HD35010FM200
12"	12.75	8	14.25	HD35012FM150	HD35012FM200
14"	14	8	14.75	HD35014FM150	HD35014FM200
16"	16	8	15.5	HD35016FM150	HD35016FM200
18"	18	8	17.75	HD35018FM150	HD35018FM200
20"	20	8	18	HD35020FM150	HD35020FM200
24"	24	10	21	HD35024FM150	HD35024FM200

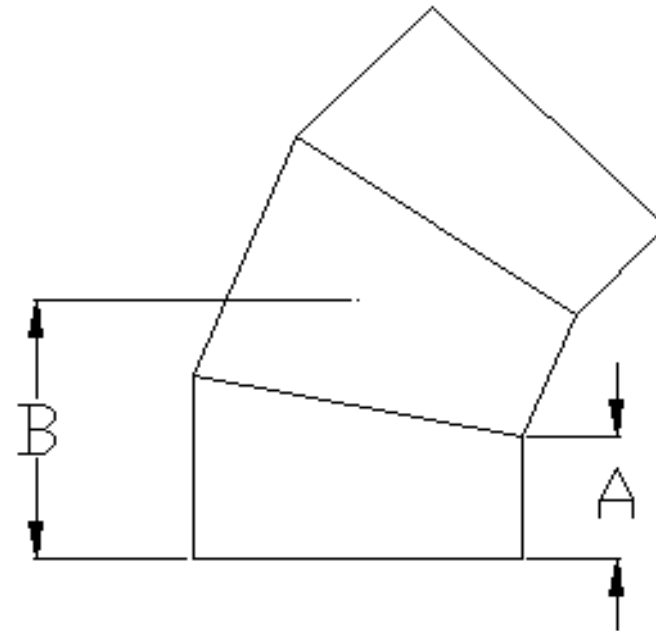

Description: IPS HDPE 3 PC 45 DEGREE
 ELBOW PLAIN-ENDS
 Material: HDPE
 Size: 2" - 24"
 CLASS 150, CLASS 200
 PSI RATINGS 150, 200

NOTE:

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge.

FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.