


# SPECIFIED FITTINGS, LLC

**164 W. SMITH RD  
BELLINGHAM, WA 98226  
888-734-8846 (T)  
888-734-8258 (F)  
[spec@specfit.com](mailto:spec@specfit.com)**

**483 STEVENSVILLE AIRPORT RD.  
STEVENSVILLE, MT 59870  
406-777-3466 (T)  
406-777-7181 (F)  
[sales@specfit.com](mailto:sales@specfit.com)**

[www.specfit.com](http://www.specfit.com)

SIZE	OD	A	B	CL/150 PART #	CL/200 PART #
4"	4.5	6	6.25	HD3104FM150DIPS	HD3104FM200DIPS
6"	6.625	6	6.25	HD3106FM150DIPS	HD3106FM200DIPS
8"	8.625	6.5	7	HD3108FM150DIPS	HD3108FM200DIPS
10"	10.75	6.5	7	HD31010FM150DIPS	HD31010FM200DIPS
12"	12.75	8	8.75	HD31012FM150DIPS	HD31012FM200DIPS
14"	14	8	8.75	HD31014FM150DIPS	HD31014FM200DIPS
16"	16	8	8.75	HD31016FM150DIPS	HD31016FM200DIPS
18"	18	8	9	HD31018FM150DIPS	HD31018FM200DIPS
20"	20	8	9	HD31020FM150DIPS	HD31020FM200DIPS
24"	24	10	11.25	HD31024FM150DIPS	HD31024FM200DIPS

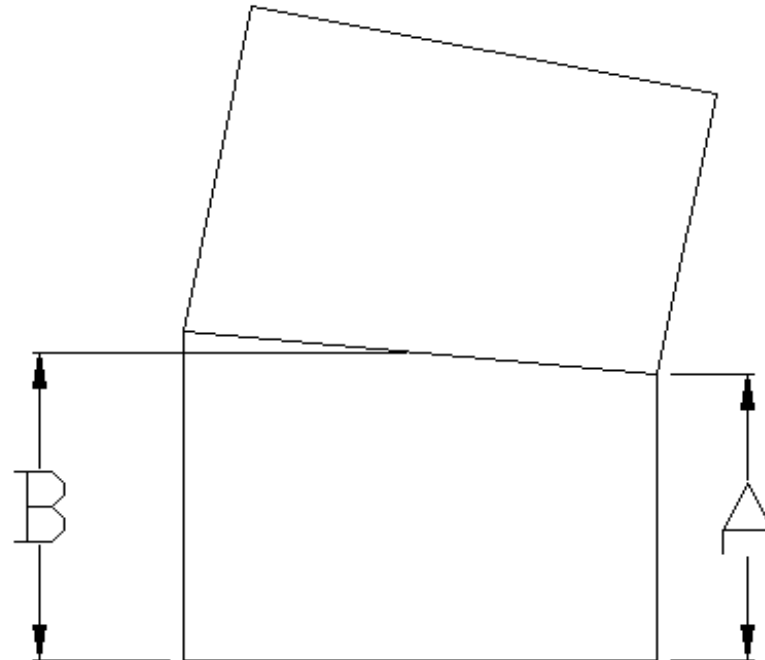

**NOTE:**

Description: DIPS HDPE 2 PC 11.25 DEGREE ELBOW PLAIN-ENDS  
Material: HDPE  
Size: 4" - 24"  
CLASS 150, CLASS 200  
PSI RATINGS 150, 200

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge.

Version 1.5, Copyright 2017

FOR DISCLAIMER REFER TO FM DIMENSION CATALOG

PAGE #62