


SPECIFIED FITTINGS, LLC

164 W. SMITH RD
 BELLINGHAM, WA 98226
 888-734-8846 (T)
 888-734-8258 (F)
spec@specfit.com

483 STEVENSVILLE AIRPORT RD.
 STEVENSVILLE, MT 59870
 406-777-3466 (T)
 406-777-7181 (F)
sales@specfit.com

www.specfit.com

SIZE	OD	A	B	CL/150 PART #	CL/200 PART #
4"	4.8	6	6.75	HD3404FM150DIPS	HD3404FM200DIPS
6"	6.9	6	7	HD3406FM150DIPS	HD3406FM200DIPS
8"	9.05	6.5	7.75	HD3408FM150DIPS	HD3408FM200DIPS
10"	11.1	6.5	8	HD34010FM150DIPS	HD34010FM200DIPS
12"	13.2	8	9.75	HD34012FM150DIPS	HD34012FM200DIPS
14"	15.3	8	10	HD34014FM150DIPS	HD34014FM200DIPS
16"	17.4	8	10.25	HD34016FM150DIPS	HD34016FM200DIPS
18"	19.5	8	10.5	HD34018FM150DIPS	HD34018FM200DIPS
20"	21.6	8	11	HD34020FM150DIPS	HD34020FM200DIPS
24"	25.8	10	13.5	HD34024FM150DIPS	HD34024FM200DIPS

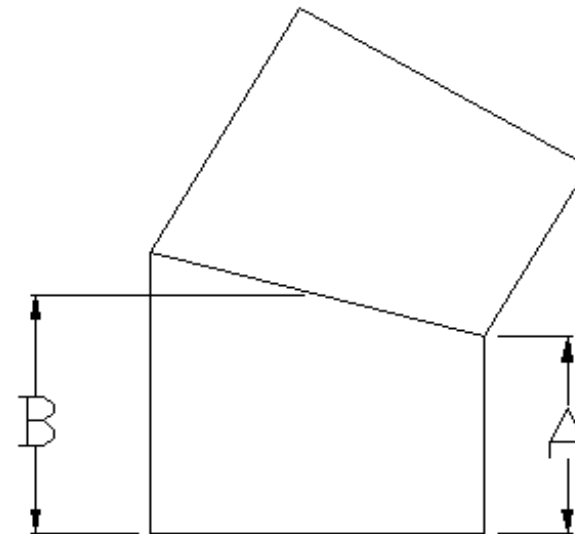

Description: DIPS HDPE 2 PC 30 DEGREE
 ELBOW PLAIN-ENDS
 Material: HDPE
 Size: 4" - 24"
 CLASS 150, CLASS 200
 PSI RATINGS 150, 200

NOTE:

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge.
 FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.