


SPECIFIED FITTINGS, LLC

**164 W. SMITH RD
BELLINGHAM, WA 98226**
888-734-8846 (T)
888-734-8258 (F)
spec@specfit.com

**483 STEVENSVILLE AIRPORT RD.
STEVENSVILLE, MT 59870**
406-777-3466 (T)
406-777-7181 (F)
sales@specfit.com

www.spectit.com

SIZE	A	PART #	CLASS
4"	7.75	HD2604FM150DIPS	150
4"	7.75	HD2604FM200DIPS	200
6"	10.5	HD2606FM150DIPS	150
6"	10.5	HD2606FM200DIPS	200
8"	11.75	HD2608FM150DIPS	150
8"	11.75	HD2608FM200DIPS	200
10"	13.25	HD26010FM150DIPS	150
10"	13.25	HD26010FM200DIPS	200
12"	15.75	HD26012FM150DIPS	150
12"	15.75	HD26012FM200DIPS	200
14"	16.25	HD26014FM150DIPS	150
14"	16.25	HD26014FM200DIPS	200
16"	17.25	HD26016FM150DIPS	150
16"	17.25	HD26016FM200DIPS	200
18"	18.25	HD26018FM150DIPS	150
18"	18.25	HD26018FM200DIPS	200
20"	19.25	HD26020FM150DIPS	150
20"	19.25	HD26020FM200DIPS	200
24"	22	HD26024FM150DIPS	150

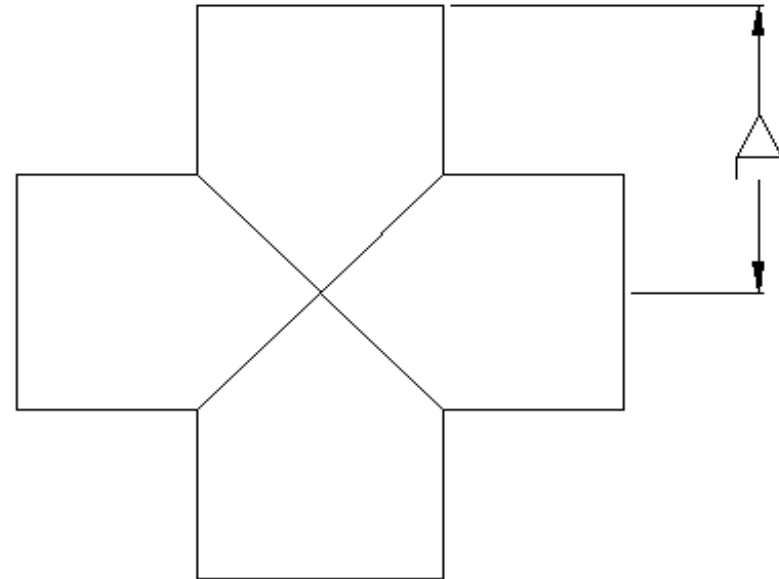

Description: DIPS HDPE CROSS
PLAIN-ENDS
Material: HDPE
Size: 4" - 24"
CLASS 150, CLASS 200
PSI RATINGS 150, 200

NOTE:

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge.

FOR DISCLAIMER REFER TO FM CATALOG