


## SPECIFIED FITTINGS, LLC

164 W. SMITH RD  
 BELLINGHAM, WA 98226  
 888-734-8846 (T)  
 888-734-8258 (F)  
[spec@specfit.com](mailto:spec@specfit.com)

483 STEVENSVILLE AIRPORT RD.  
 STEVENSVILLE, MT 59870  
 406-777-3466 (T)  
 406-777-7181 (F)  
[sales@specfit.com](mailto:sales@specfit.com)

[www.specfit.com](http://www.specfit.com)

SIZE	OD	A	B	R	CL/150 PART #	CL/200 PART #
4"	4.8	6	11.6	13.5	HD7844FM150DIPS	HD7844FM200DIPS
6"	6.9	7	15.2	19.9	HD7846FM150DIPS	HD7846FM200DIPS
8"	9.05	10	20.1	24.5	HD7848FM150DIPS	HD7848FM200DIPS
10"	11.1	11	24.4	32.25	HD78410FM150DIPS	HD78410FM200DIPS
12"	13.2	13	28.9	38.3	HD78412FM150DIPS	HD78412FM200DIPS
14"	15.3	13	29.1	38.9	HD78414FM150DIPS	HD78414FM200DIPS

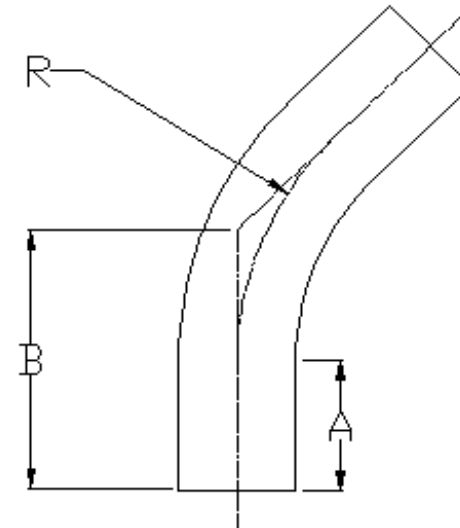

Description: DIPS HDPE 45 DEGREE SWEEP  
 PLAIN-ENDS  
 Material: HDPE  
 Size: 4"-14"  
 CLASS 150, CLASS 200  
 PSI RATINGS 150, 200

**NOTE:**

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge.

FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.

Version 1.5, Copyright 2017

PAGE #83