


# SPECIFIED FITTINGS, LLC

164 W. SMITH RD  
 BELLINGHAM, WA 98226  
 888-734-8846 (T)  
 888-734-8258 (F)  
[spec@specfit.com](mailto:spec@specfit.com)

483 STEVENSVILLE AIRPORT RD.  
 STEVENSVILLE, MT 59870  
 406-777-3466 (T)  
 406-777-7181 (F)  
[sales@specfit.com](mailto:sales@specfit.com)

[www.specfit.com](http://www.specfit.com)

SIZE	OD	A	B	C	CL/150 PART #	CL/200 PART #
4"	4.8	29.5	21.75	6.5	HD9204FM150DIPS	HD9204FM200DIPS
6"	6.9	36.5	28.25	6.75	HD9206FM150DIPS	HD9206FM200DIPS
8"	9.05	39.5	31	6.75	HD9208FM150DIPS	HD9208FM200DIPS
10"	11.1	42	33	6.75	HD9210FM150DIPS	HD9210FM200DIPS
12"	13.2	46.75	35.75	8.25	HD9212FM150DIPS	HD9212FM200DIPS
14"	15.3	49.75	38.25	8.5	HD9214FM150DIPS	HD9214FM200DIPS
16"	17.4	59	44.75	10.5	HD9216FM150DIPS	HD9216FM200DIPS
18"	19.5	64.75	50.25	10.5	HD9218FM150DIPS	HD9218FM200DIPS
20"	21.6	76.25	60.75	11	HD9220FM150DIPS	HD9220FM200DIPS
24"	25.8	82.25	65.75	11	HD9224FM150DIPS	HD9224FM200DIPS

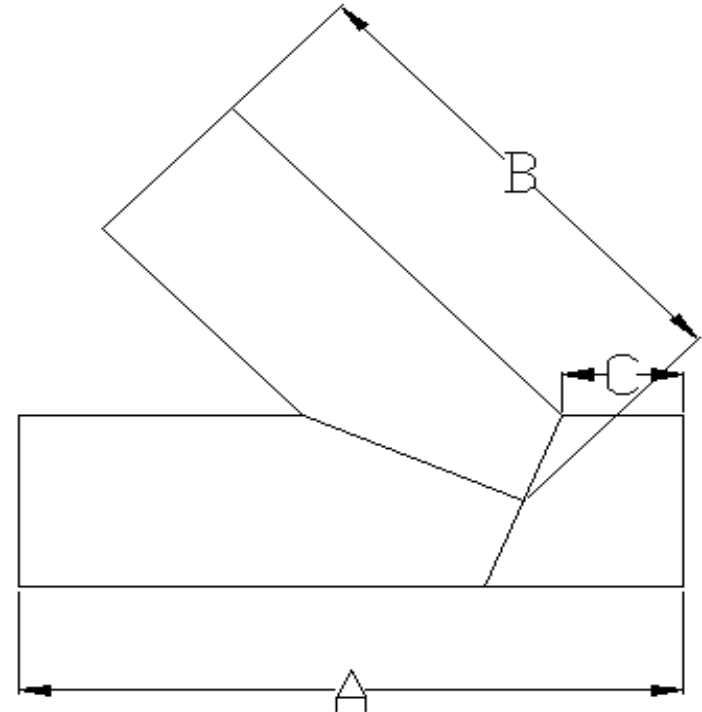

Description: DIPS HDPE FABRICATED WYE  
 PLAIN-ENDS  
 Material: HDPE  
 Size: 4"-24"  
 CLASS 150, CLASS 200  
 PSI RATINGS 150, 200

Version 1.5, Copyright 2017

**NOTE:**

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge.

FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.