




Specified Fittings, LLC

164 West Smith Road • PO Box 28157 • Bellingham, WA 98228-0157 | Email: sales@specfit.com

Bellingham: 360-398-7700 | 360-398-7051 Fax
Stevensville: 406-777-3466 | 406-777-7181 Fax
Mexico (Toll Free): 800-429-1705 | 800-574-1075 Fax



SIZE	OD	A	B	CL/150 PART #	CL/200 PART#
2"	2.375	4.75	5.25	HD3492FM150	HD3492FM200
3"	3.5	5	5.75	HD3493FM150	HD3493FM200
4"	4.5	5.75	6.5	HD3494FM150	HD3494FM200
5"	5.563	5.75	6.75	HD3495FM150	HD3495FM200
6"	6.625	6.5	7.75	HD3496FM150	HD3496FM200
8"	8.625	7	8.75	HD3498FM150	HD3498FM200
10"	10.75	7.25	9.5	HD34910FM150	HD34910FM200
12"	12.75	7.75	10.5	HD34912FM150	HD34912FM200
14"	14	8.75	11.75	HD34914FM150	HD34914FM200
16"	16	9.25	12.5	HD34916FM150	HD34916FM200
18"	18	10	13.75	HD34918FM150	HD34918FM200
20"	20	10	14.25	HD34920FM150	HD34920FM200
24"	24	10.5	15.5	HD34924FM150	HD34924FM200

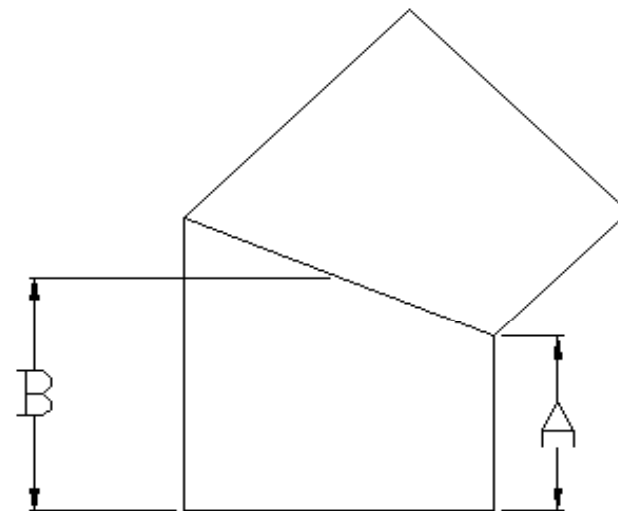

Description: IPS HDPE 2 PC 45 DEGREE ELBOW
PLAIN-ENDS

Material: HDPE

Size: 2" - 24"
CLASS 150, CLASS 200

PSI RATINGS 150, 200

NOTE:

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge.

FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.