




Specified Fittings, LLC

164 West Smith Road • PO Box 28157 • Bellingham, WA 98228-0157 | Email: sales@specfit.com

Bellingham: 360-398-7700 | 360-398-7051 Fax
Stevensville: 406-777-3466 | 406-777-7181 Fax
Mexico (Toll Free): 800-429-1705 | 800-574-1075 Fax



SIZE	OD	A	B	CL/150 PART #	CL/200 PART #
2"	2.375	4.75	8.75	HD3692FM150	HD3692FM200
3"	3.5	5	9.5	HD3693FM150	HD3693FM200
4"	4.5	5.75	10.5	HD3694FM150	HD3694FM200
5"	5.563	5.75	11.25	HD3695FM150	HD3695FM200
6"	6.625	6.5	12.5	HD3696FM150	HD3696FM200
8"	8.625	7	15.5	HD3698FM150	HD3698FM200
10"	10.75	7.25	17	HD36910FM150	HD36910FM200
12"	12.75	7.75	18.75	HD36912FM150	HD36912FM200
14"	14	8.75	20.75	HD36914FM150	HD36914FM200
16"	16	9.25	22.5	HD36916FM150	HD36916FM200
18"	18	10	25	HD36918FM150	HD36918FM200
20"	20	10	26.5	HD36920FM150	HD36920FM200
24"	24	10.5	30.25	HD36924FM150	HD36924FM200

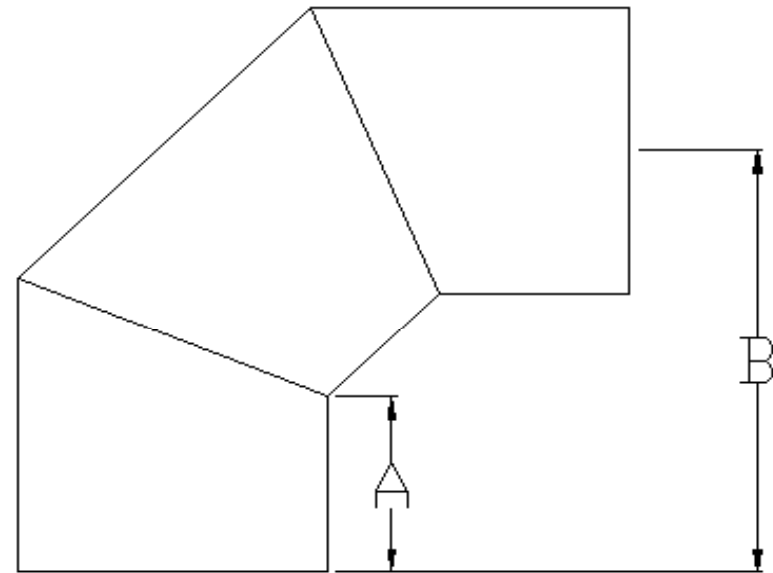

Description: IPS HDPE 3 PC 90 DEGREE ELBOW PLAIN-ENDS
 Material: HDPE
 Size: 2" - 24"
 CLASS 150, CLASS 200
 PSI RATINGS 150, 200

Version 1.3, Copyright 2013

NOTE:

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge. FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.