




# Specified Fittings, LLC

164 West Smith Road • PO Box 28157 • Bellingham, WA 98228-0157 | Email: sales@specfit.com

Bellingham: 360-398-7700 | 360-398-7051 Fax  
Stevensville: 406-777-3466 | 406-777-7181 Fax  
Mexico (Toll Free): 800-429-1705 | 800-574-1075 Fax



SIZE	OD	A	B	CL/150 PART #	CL/200 PART #
4"	4.8	5.75	14.75	HD3504FM150DIPS	HD3504FM200DIPS
6"	6.9	6.5	17	HD3506FM150DIPS	HD3506FM200DIPS
8"	9.05	7	20.5	HD3508FM150DIPS	HD3508FM200DIPS
10"	11.1	7	21.5	HD35010FM150DIPS	HD35010FM200DIPS
12"	13.2	7.5	23.25	HD35012FM150DIPS	HD35012FM200DIPS
14"	15.3	8.5	26.25	HD35014FM150DIPS	HD35014FM200DIPS
16"	17.4	9	28.25	HD35016FM150DIPS	HD35016FM200DIPS
18"	19.5	9.5	31	HD35018FM150DIPS	HD35018FM200DIPS
20"	21.6	9.5	32.25	HD35020FM150DIPS	HD35020FM200DIPS
24"	25.8	10	36.25	HD35024FM150DIPS	HD35024FM200DIPS

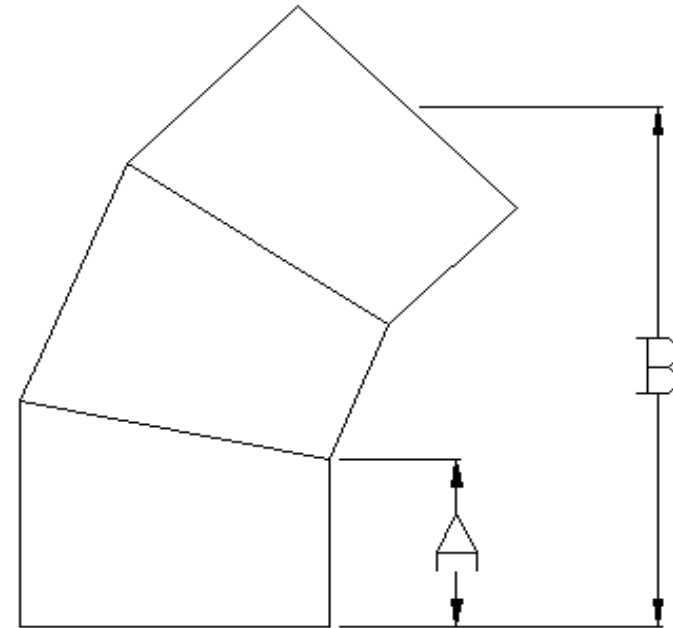

Description: DIPS HDPE 3 PC 45 DEGREE  
ELBOW PLAIN-ENDS  
Material: HDPE  
Size: 4" - 24"  
CLASS 150, CLASS 200  
PSI RATINGS 150, 200

Version 1.3, Copyright 2013

#### NOTE:

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge. FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.