



Specified Fittings, LLC

164 West Smith Road • PO Box 28157 • Bellingham, WA 98228-0157 | Email: sales@specfit.com


Bellingham: 360-398-7700 | 360-398-7051 Fax

Stevensville: 406-777-3466 | 406-777-7181 Fax

Mexico (Toll Free): 800-429-1705 | 800-574-1075 Fax



SIZE	A	B	L	PRESSURE	
				CLASS	PART #
4"	4.1	7.85	15.63	150	MHD8204FM150DIPS
4"	4.1	7.85	15.63	200	MHD8204FM200DIPS
6"	5.1	9.67	19.34	150	MHD8206FM150DIPS
6"	5.1	9.67	19.34	200	MHD8206FM200DIPS
8"	5.17	11.58	23.15	150	MHD8208FM150DIPS
8"	5.17	11.58	23.15	200	MHD8208FM200DIPS

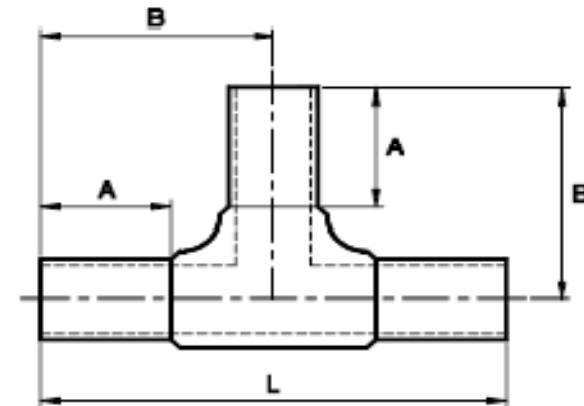

Description: DIPS HDPE MOLDED TEES
PLAIN-ENDS

Material: HDPE

Size: 4"-8"
CLASS 150, CLASS 200

PSI RATINGS 150, 200

Version 1.3, Copyright 2013

NOTE:

Molded fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61.

Other OD's, SDR's and Pressure Ratings available upon request.

Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge.

FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.