




Specified Fittings, LLC

164 West Smith Road • PO Box 28157 • Bellingham, WA 98228-0157 | Email: sales@specfit.com

Bellingham: 360-398-7700 | 360-398-7051 Fax
Stevensville: 406-777-3466 | 406-777-7181 Fax
Mexico (Toll Free): 800-429-1705 | 800-574-1075 Fax



SIZE	OD	A	B	CL/150 PART #	CL/200 PART #
2"	2.375	4.75	5.5	HD3592FM150	HD3592FM200
3"	3.5	5	6	HD3593FM150	HD3593FM200
4"	4.5	5.75	7	HD3594FM150	HD3594FM200
5"	5.563	5.75	7.25	HD3595FM150	HD3595FM200
6"	6.625	6.5	8.5	HD3596FM150	HD3596FM200
8"	8.625	7	9.5	HD3598FM150	HD3598FM200
10"	10.75	7.25	10.25	HD35910FM150	HD35910FM200
12"	12.75	7.75	11.5	HD35912FM150	HD35912FM200
14"	14	8.75	12.75	HD35914FM150	HD35914FM200
16"	16	9.25	14	HD35916FM150	HD35916FM200
18"	18	10	15	HD35918FM150	HD35918FM200
20"	20	10	15.75	HD35920FM150	HD35920FM200
22"	22	10.5	16.75	HD35922FM150	HD35922FM200
24"	24	10.5	17.5	HD35924FM150	HD35924FM200

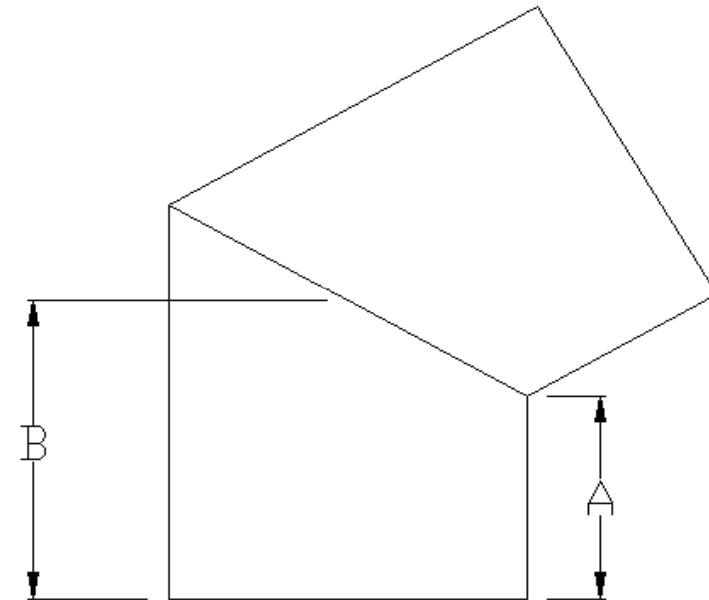

Description: IPS HDPE 2 PC. 60 DEGREE ELBOW PLAIN-ENDS
Material: HDPE
Size: 2" - 24"
CLASS 150, CLASS 200
PSI RATINGS 150, 200

NOTE:

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge.

FOR DISCLAIMER REFER TO FM CATALOG